

# SNAP ACTION SWITCH

## Features

- Ultra small type, light weight
- Terminals are insert molded against flux penetration during soldering.
- Good feeling and more levers are applied.




## Applications

- Operating in all types of electronic equipment such as appliances, audio, mouse, office, equipment, communications apparatus, etc.


## Specifications

Item	Standard
Rating	3A 125V AC or 1A 250V AC
Insulation Resistance	100M $\Omega$ min. (DC 500V)
Dielectric Strength	AC 500V (50/60Hz for 1 minute)
Contact Resistance	50m $\Omega$ max. (initial)
Electrically Life	30,000 cycle

## Mounting Hole



## For P.C.B. Terminal


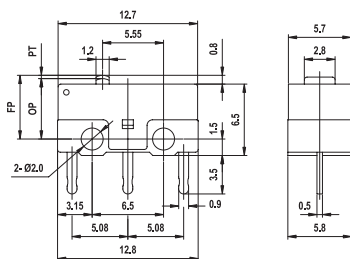

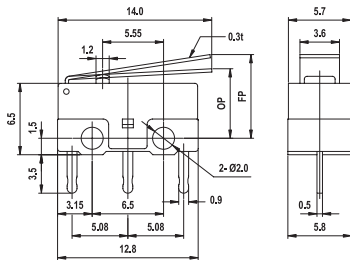

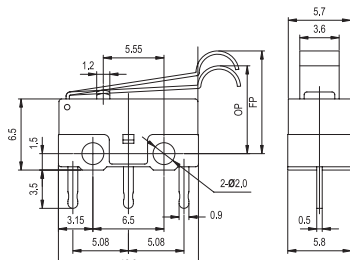


## Product Selection

DM-0	1. ACTUATOR TYPES
□	0: Pin plunger
1	1: Hinge lever
	4: Simulated roller lever

## Operating Characteristics

Unit: mm

Item	Operating Characteristics	Dimensions																		
<b>DM-00L</b> 	<table border="1"> <tbody> <tr><td>OF</td><td>max</td><td>150g.</td></tr> <tr><td>RF</td><td>min</td><td>20g</td></tr> <tr><td>PT</td><td>max..</td><td>0.5 mm</td></tr> <tr><td>OT</td><td>min.</td><td>0.25 mm</td></tr> <tr><td>MD</td><td>max.</td><td>0.12 mm</td></tr> <tr><td>OP</td><td></td><td>5.5±0.3 mm</td></tr> </tbody> </table>	OF	max	150g.	RF	min	20g	PT	max..	0.5 mm	OT	min.	0.25 mm	MD	max.	0.12 mm	OP		5.5±0.3 mm	
OF	max	150g.																		
RF	min	20g																		
PT	max..	0.5 mm																		
OT	min.	0.25 mm																		
MD	max.	0.12 mm																		
OP		5.5±0.3 mm																		
<b>DM-01L</b> 	<table border="1"> <tbody> <tr><td>OF</td><td>max.</td><td>80g</td></tr> <tr><td>RF</td><td>min.</td><td>5g</td></tr> <tr><td>PT</td><td>max.</td><td>-</td></tr> <tr><td>OT</td><td>min.</td><td>0.55 mm</td></tr> <tr><td>MD</td><td>max.</td><td>0.5 mm</td></tr> <tr><td>OP</td><td></td><td>6.8±1.5 mm</td></tr> </tbody> </table>	OF	max.	80g	RF	min.	5g	PT	max.	-	OT	min.	0.55 mm	MD	max.	0.5 mm	OP		6.8±1.5 mm	
OF	max.	80g																		
RF	min.	5g																		
PT	max.	-																		
OT	min.	0.55 mm																		
MD	max.	0.5 mm																		
OP		6.8±1.5 mm																		
<b>DM-04L</b> 	<table border="1"> <tbody> <tr><td>OF</td><td>max.</td><td>80g</td></tr> <tr><td>RF</td><td>min.</td><td>5g</td></tr> <tr><td>PT</td><td>max.</td><td>-</td></tr> <tr><td>OT</td><td>min.</td><td>0.55 mm</td></tr> <tr><td>MD</td><td>max.</td><td>0.5 mm</td></tr> <tr><td>OP</td><td></td><td>8.8±1.5 mm</td></tr> </tbody> </table>	OF	max.	80g	RF	min.	5g	PT	max.	-	OT	min.	0.55 mm	MD	max.	0.5 mm	OP		8.8±1.5 mm	
OF	max.	80g																		
RF	min.	5g																		
PT	max.	-																		
OT	min.	0.55 mm																		
MD	max.	0.5 mm																		
OP		8.8±1.5 mm																		